# Loudoun County, Virginia

W X

a a

Maleh



**Catoctin Creek - State Designated Scenic River** 

# 2023 Water Resources Monitoring Data Summary



Loudoun County, Virginia Department of Building and Development Natural Resources Division Floodplain Management Team

May 2024

#### ABBREVIATIONS AND ACRONYMS

DEQ:	Virginia Department of Environmental Quality
EPA:	U.S. Environmental Protection Agency
MCL:	maximum contaminant level
CFS:	Cubic feet per second
mg/L:	milligrams per Liter
NWS-COOP:	National Weather Service Cooperative monitoring station
OWTS:	On-site Wastewater Treatment System
USGS:	U.S. Geological Survey
NWS:	National Weather Service (Division of National Oceanographic and Atmospheric
Administratio	on)

#### DATA LIMITATIONS

While efforts have been made to ensure the accuracy of the data presented in this report, Loudoun County does not assume any liability arising from the use of these data. Reliance on these data is at the risk of the user. The U.S. Geological Survey (USGS) and the National Climatic Data Center (who distribute National Weather Service data) have data quality assurance procedures in which data are considered "Provisional" until they are checked and corrected as needed. Data used in this report are all "Approved".

#### **HYPERLINKS**

The underlined text in this document indicates hyperlinks to additional data and online resources that may be accessed when this document is opened in a program designed to view portable document format (pdf) files. The report can be found at <u>www.loudoun.gov/watermonitoring</u> and follow the link to Data Analysis & Reporting.

#### ACKNOWLEDGMENTS

This document was prepared by David Ward, Floodplain Management Team in the Natural Resources Division of the Department of Building and Development. Cover Photo: Catoctin Creek by David Ward.

### Loudoun County, VA 2023 Water Resources Monitoring Data Summary

### **Table of Contents**

Introduction and Setting	1
General Characteristics of Loudoun County	
Physiography and Geology	
Watersheds	
Water Quantity	
Precipitation	
Snowfall	
Streamflow	
Groundwater Levels and Wells	7
Water Quality	Q
Surface Water Chemistry	
Surface Water Microbiology	
Benthic Macroinvertebrates	
Stream Health Trend	
Stream Impairments	
Groundwater Quality	13
Summary	14
Water Resources Highlight	15
Moment to Remember	16

#### **INTRODUCTION AND SETTING**

This document summarizes data collected during various water resources monitoring activities in and adjacent to Loudoun County, Virginia (the County), by government, private and volunteer organizations during calendar year 2023. Specifically, data characterizing precipitation, streamflow, groundwater levels, and surface water and groundwater quality are presented. The Loudoun County Department of Building and Development collects these data or compiles them from other sources. Efforts originated with the Loudoun County Water Resources Monitoring Program in 2001 as originally funded through a grant from the US Environmental Protection Agency (EPA). Although the grant ended in 2009 the County continues to collect and compile groundwater level and streamflow data. This document presents and discusses the data in two sections: water quantity – measurements of precipitation, streamflow, and groundwater levels; and water quality – the chemical and biological characteristics of stream water and groundwater.

Loudoun County has been one of the fastest growing counties in the nation during the past decade. The estimated population of Loudoun County in 2023 is estimated to be 440,071 and is forecast to reach 548,511 by 2050; an increase of 24.6 percent.

#### **General Characteristics of Loudoun County**

Located in Northern Virginia approximately 30 miles west of Washington, D.C., Loudoun County covers an area of 521 square miles. The Potomac River boarders the County to the north and Blue Ridge Mountains boarders it to the west. (Figure 1).

Urban and suburban development is concentrated mostly in the eastern part of the County, generally from the Town of Leesburg to Washington Dulles International Airport and the border with Fairfax County. The

western portion of the County is more rural, with crop farms, pastures, vineyards, several small towns, and numerous large-lot residential subdivisions.

Loudoun Water, formerly known as the Loudoun County Sanitation Authority, owns and operates a centralized water and sewer system that serves the developed area of eastern Loudoun as shown in Figure 1. The Town of Leesburg provides treated Potomac River water to residents inside the Town limits, and to several residential areas adjacent to its eastern boundary. Outside of the Leesburg and Loudoun Water central service areas, countv residents obtain water primarily from wells. In the rural towns and several of the subdivisions, water may come from communal water systems and sewage is treated in small wastewater treatment plants. The remaining single-family homes and businesses have on-site individual wastewater treatment systems.

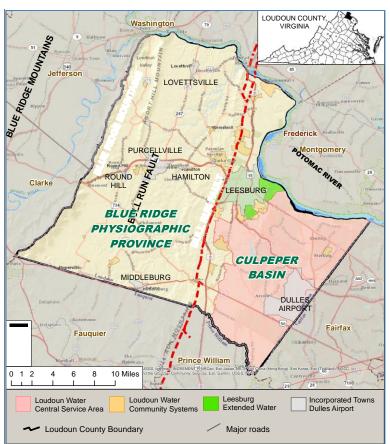


Figure 1. Major features of Loudoun County, VA.

#### **Physiography and Geology**

Loudoun County intersects two physiographic provinces which are separated by the Bull Run Fault (Figure 1). The fault separates the Culpeper Basin (a Triassic-age rift basin) of the Piedmont Province on the east from the Blue Ridge Province to the west. The Culpeper Basin is comprised of sedimentary rocks and sedimentary-derived metamorphic rocks, both of which may include intrusions of dense, igneous diabase rock. Limestone conglomerate rock (the Leesburg Member of the Balls Bluff Siltstone) underlies the northeastern area of the County, generally from the Town of Leesburg northward, and has the surface features and hydrogeologic characteristics of a karst environment. Western Loudoun is underlain by metamorphic rocks derived from both sedimentary and igneous parent material. Regolith (unconsolidated sediments and soils) covers the bedrock in the County and is commonly between 20 and 50 feet thick, but ranges from 0 to more than 90 feet thick. Soils are generally less permeable in eastern Loudoun compared to western Loudoun.

#### Watersheds

Defined by topography, watersheds drain all the surface water in an area to a single location such as a stream or lake. They are often used to delineate areas for monitoring, analyzing, and managing water resources. Watersheds can be defined at many different scales but the watershed scale that is most convenient for county-wide investigations in Loudoun County is based on the 17 watershed areas shown in Figure 2. Three major drainage areas cover most of Loudoun County. These drainage areas empty into the Potomac River by

way of the following stream systems: Goose Creek, Catoctin Creek, and Broad Run.

The eastern and southern borders of the County share watersheds with the neighboring Virginia counties of Fairfax, Prince William, and Fauquier. The upper reaches of Broad Run and Sugarland Run watersheds lie to the east in Fairfax County and Goose Creek originates to the southwest in Fauquier County. All three streams/watersheds drain into Loudoun County and ultimately the Potomac River.

The southeastern region of Loudoun includes the headwaters of Bull Run and Cub Run. These streams drain out of Loudoun County to the south and are tributaries to the Occoquan River which eventually discharge into the Potomac River.

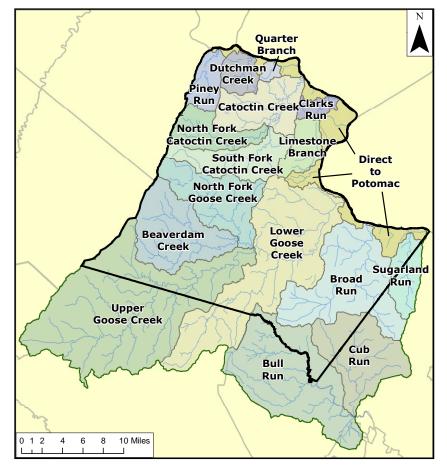


Figure 2. Watersheds and streams in and adjacent to Loudoun County, VA.

#### WATER QUANTITY

This section presents information on the quantity of water resources with data on precipitation, streamflow, and groundwater levels in Loudoun County during calendar year 2023.

#### Precipitation

Total annual precipitation in 2023, was 34.8 inches, which is 5.0 inches (13%) less than normal. The (median) annual precipitation for the full period of record between 1964 and 2023 at the Dulles Airport monitoring station was 39.8 inches. Precipitation data are obtained from seven monitoring sites in the County (Figure 3). Four precipitation stations are part of the National Weather Service's (NWS) cooperative monitoring network, and the U.S. Geological Survey (USGS) operates two rain gages (Table 1). The NWS sites have relatively long periods of record. The two USGS rain gages have mostly continuous data records beginning in 2004 and 2005 and provide data at 5-minute intervals.

Data from the long-term records indicate that annual precipitation has ranged from a minimum of 17.8 inches (at the archived Lincoln station in 1930 and no longer in service) to maximum of 76.1 inches (at the Limestone Branch station in 2003). For purposes of identifying "normal" ("average") conditions and for comparison to

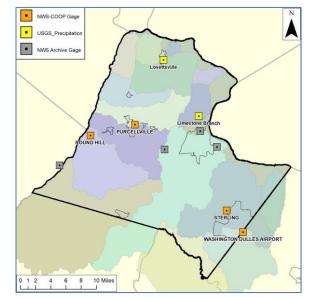


Figure 3. Precipitation monitoring sites.

current conditions, the standard practice is to group climatic data into periods of 40 consecutive years with the most recent year of the group ending in "0". For the 40-year period of 1981 through 2020, the annual median precipitation at the Dulles Airport was 34.8 inches and for the period of record 39.8 inches.

Table 1. Precipitation monitoring stations and data.
--

Precipitation	Start of Station			itatistics (Ind	2023 Total	Days	
Monitoring Station Name	Record <sup>1</sup>	by <sup>2, 3</sup>	Minimum	Median	Maximum	(Inches) <sup>3</sup>	missing in 2023
Dulles Airport	1963	NWS-COOP	27.0	39.8	66.7	34.8	0
Limestone Branch	2004	USGS	27.0	38.3	76.1	27.0	1
Round Hill	2018	NWS-COOP	35.0	44.2	65.6	35.0	0
Lovettsville	2005	USGS	27.0	36.5	61.3	27.0	0
Purcellville	1900	NWS-COOP	17.8	38.7	63.5	26.7	0
Dulles Sterling RCS	1978	NWS-COOP	30.3	42.2	67.7	40.4	0

<sup>1</sup> First full year that generally continuous data collection began.

<sup>2</sup> National Weather Service Cooperative weather station; U.S. Geological Survey

<sup>3</sup> NWS-COOP stations record liquid & frozen precipitation; USGS & Loudoun stations record rainfall only.

<sup>4</sup> Annual precipitation statistics based on site's period of available record through 2023 (see footnote 1).


Figure 4 presents annual precipitation data from the Dulles Airport from 1981 through 2023. The average annual precipitation has been 40.8 inches with a slight increasing trend.

In 2023 the NWS increased from four to eight sites reporting completed records. For consistency with previous reports only four stations are included in this report.

Figure 5 shows 2023 monthly precipitation at the Dulles Airport in relation to monthly data for the 40-year period from 1981 through 2020. The data indicate that precipitation during July, September and December were above normal, whereas all other months were below normal, especially January, March, May, August and October.

During 2023 the maximum number of consecutive days without precipitation as measured by USGS in Lovettsville was 15 days. The maximum in 2013 was 53 days.

A graph of daily precipitation at the Dulles station is shown in Figure 6. There were three days when precipitation exceeded 1.5 inches. Over the entire year, there were 254 days with no recorded precipitation at the Dulles station.

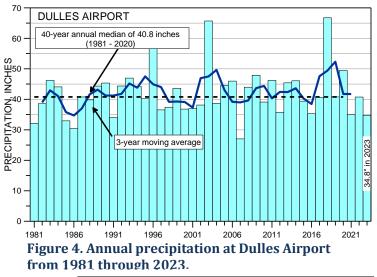

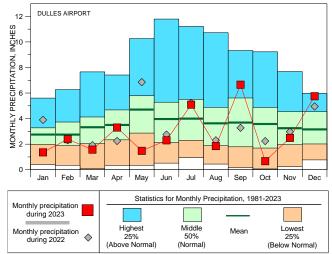


Figure 5. Monthly precipitation at Dulles Airport.


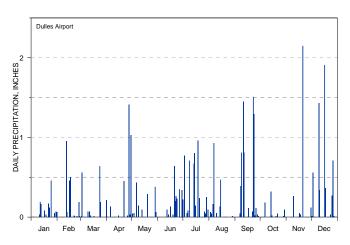


Figure 6. Daily precipitation at Dulles Airport in 2023.

#### Snowfall

Of the total precipitation at the Sterling station during 2023-2024 season, frozen precipitation averaged 13.4 inches, which was slightly below the normal annual total of 18.7 inches of frozen precipitation and well below the 75.1 inches in winter season 2009-2010. The total snow depths are aggregated from daily values recorded at five weather stations operated by the National Weather Services as shown in Figure 7. In early years data were available from Mt. Weather, Dulles, and Sterling. In recent years data are available for Sterling, Dulles, Purcellville, and Round Hill. The average total of the stations for each season is also shown.

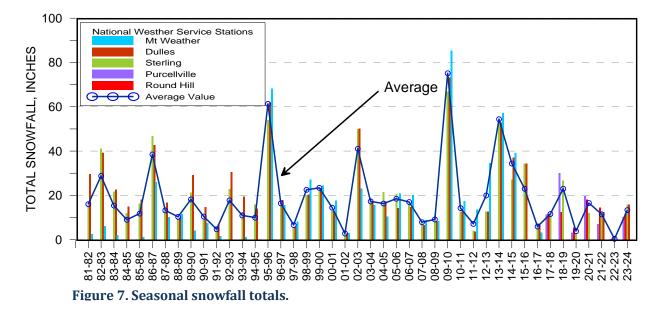

#### Streamflow

Perennial streams flow all or most of the year. In the past, the USGS has estimated that Loudoun County has approximately 507 miles of perennial streams while more recent investigations using additional data and standardized methodologies have indicated that the County may have over 1,500 miles of perennial streams. Knowing how much water flows in the larger perennial streams and how it varies over both short and long time periods is useful in the assessment of floodplains, flood control, stormwater structures, and environmental conditions. There are 10 stream gauges that measure and record water stage (level) in Loudoun County streams (Figure 8). Measured water levels at each gauging station are reported via telemetry to the USGS, correlated to historical sitespecific stream discharges (flows), and the data posted in near real-time with updates normally every 15 minutes. The data are available at the USGS web site for Loudoun County. Three additional stream gauges are located along the County's perimeter: at Harpers Ferry and Point of Rocks on the Potomac River (both with real-time data on an internet web page) and on Bull Run near Route 705. The USGS regularly inspects the gauging stations to check the

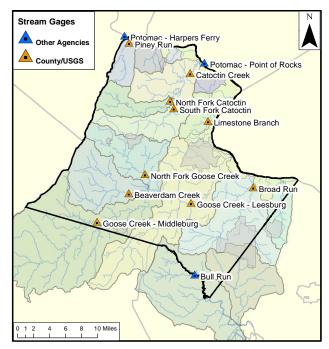


Figure 8. Locations of stream gaging stations.

monitoring equipment and measure stream channel cross sections, water levels, and streamflow velocities to maintain calibration and data accuracy. However, data are considered provisional until passing the USGS's full quality control process.

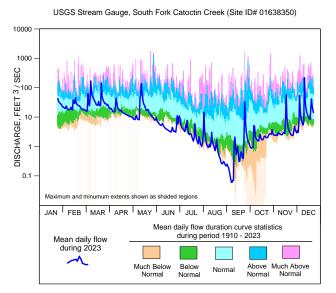


Figure 9. Stream discharge hydrograph for South Fork Catoctin Creek during 2023 compared to data from 1910-2023.

Figure 9 illustrates mean daily flow rates in South Fork Catoctin Creek near Leesburg during 2023 and compares it to daily flow statistics at the same site for the period 1910 through 2023. These data indicate that streamflow was below normal for most of the year. Spikes in streamflow are generally correlated with rainfall at Dulles Airport (Figure 6). These two monitoring sites are approximately 5 miles apart, but the upper reaches of the watershed are over 30 miles from the Dulles precipitation station. If a storm event is localized in the upper area of the watershed, it can result in a relatively high stream discharge even though reported precipitation at the Dulles site is relatively low. The highest peak stream discharge recorded in 2023 at this station occurred on December 18, 2023. South Fork Catoctin Creek is one of the smaller watersheds with headwaters in the Town of Purcellville.

Table 2 lists the 10 gauging stations in the County along with selected data statistics. The peak flow rates for 2023 occurred on 12/18/2023.

Stream Gage Site Name	Start of Record	Drainage Area <sup>1</sup> (sq. miles)	2023 Avg <sup>2</sup> (cfs)	Previous Historic Avg <sup>3</sup> (cfs)	2023 Min <sup>4</sup> (cfs)	Previous Historic Min <sup>5</sup> (cfs)	2023 Peak <sup>6</sup> (cfs)	Previous Historic Peak <sup>7</sup> (cfs)	2023 Non- flowing <sup>8</sup> (days)	Average Annual Historic Non-flowing <sup>9</sup> (days)
Beaverdam Creek	Jul 2001	47.2	18.2	49.9	0.0	0.0	206	5,000	19	15
Broad Run	Oct 2001	76.1	95.8	126.9	9.9	1.3	2,370	10,300	0	0
Catoctin Creek - Taylorstown	Oct 1970	89.5	31.4	101.5	0.8	0.1	554	23,800	0	1.0
Goose Creek - Leesburg	Jul 1909	332.0	130.0	338.6	7.8	0.4	1,630	78,100	0	0
Goose Creek - Middleburg	Oct 1965	122.0	50.8	132.9	0.0	0.0	437	19,200	13	3.5
Limestone Branch	Aug 2001	7.9	3.1	9.1	0.4	0.4	75	976	0	0
Beaverdam Creek	Jul 2001	23.1	7.6	24.6	0.0	0.0	79	1,190	34	7.0
North Fork Goose Creek	Jul 2001	38.1	16.8	45.6	1.0	0.2	244	3,040	0	0
Piney Run	Oct 2001	13.5	5.1	14.7	0.1	0.0	69	488	0	1.4
South Fork Catoctin Creek	Jul 2001	31.6	13.1	36.4	0.1	0.0	220	1,920	0	2.2

#### Table 2. Stream gauging stations and basic statistics.

<sup>1</sup> Drainage area above the stream gage (square miles)

<sup>2</sup> Average daily flow rate during 2023

<sup>3</sup> Average daily flow rate for the period 2002–2023

<sup>4</sup> Minimum daily flow rate for the period 2002–2023

<sup>5</sup> Previous minimum daily flow rate for the period 2002–2023

<sup>6</sup> Peak daily flow rate during 2023

<sup>7</sup>Peak daily flow rate for the period 1900–2023

<sup>8</sup> Maximum number of days with very low flow (below 0.2 cfs) during 2023

 $^{\rm 9}$  Maximum number of days per year with less than 0.2 cfs flow during the period 2002–2023

#### **Groundwater Levels and Wells**

There are more than 19,000 active individual water supply wells throughout Loudoun County. Groundwater is the primary source of drinking water for most residents in western Loudoun. Groundwater levels during 2023 were recorded at 16 of 20 dedicated monitoring wells at the sites shown in Figure 10. Seventeen of these wells are operated by staff from the Department of Building and Development and three are operated by the USGS. Groundwater level data have been collected from the three USGS wells since the late 1960s or early 1970s. Most of the County-monitored wells were established as monitoring sites within the past decade, with one well dating back to 2002. Table 3 lists the monitoring wells, basic information about each well, and groundwater level data for both 2023 and the well's historic record.

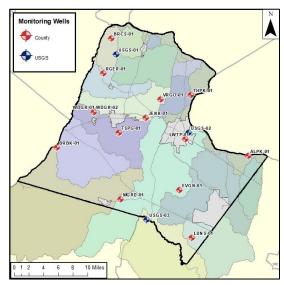


Figure 10. Locations of groundwater monitoring wells.

Well Site ID		Well			Grou	Level (feet)	) <sup>1, 2</sup>	
(see map for location)	Monitoring Organization	Depth (feet)	Rock Type	Period of Record	Historic High	2023 High	Historic Low	2023 Low
USGS-01	USGS	516	Meta-conglomerate/ metasiltstone	8/1969 - Present	1014.0	1005.9	1000.3	1000.4
USGS-02	USGS	535	Fluvial, deltaic sandstone	10/1977 - Present	364.4	363.5	343.3	352.9
USGS-03	USGS	165	Siltstone/sandstone	11/1968 - Present	416.3	414.6	407.3	409.3
BOLN-12	Loudoun	515	Fluvial, deltaic sandstone	12/2006 - 12/30/2016	340.3	NA	333.2	NA
BRCS-01	Loudoun	320	Igneous intrusive	12/2007 - Present	548.8	543.9	537.5	540.6
HARM-01	Loudoun	945	Plutonic igneous intrusive	2/2005 - 4/12/2017	501.1	NA	463.6	NA
MGRD-01	Loudoun	400	Plutonic igneous intrusive	12/2007 - Present	483.1	477.5	467.0	467.0
RGER-01	Loudoun	700	Igneous intrusive	2/2005 - Present	646.9	641.7	620.2	636.7
TSPG-01	Loudoun	360	Plutonic igneous intrusive	2/2005 - Present	434.7	432.3	423.0	423.0
WDGR-01	Loudoun	940	Mafic igneous intrusive	3/2005 - Present	618.4	603.3	602.2	603.3
WFRD-01	Loudoun	400	Plutonic igneous intrusive	11/2002 - 9/27/2016	421.9	NA	400.1	NA
BRPK-01	Loudoun	680	Igneous extrusive	7/2009 - Present	1668.5	1655.8	1648.6	1649.6
THPK-01	Loudoun	360	Limestone conglomerate	7/2009 - Present	222.3	195.5	186.8	186.8
ALPK-01	Loudoun	240	Alluvium/metasiltstone	7/2009 - Present	187.1	180.3	0.0	173.7
HRKN-01	Loudoun	600	Plutonic igneous intrusive	3/2009 - 9/3/2020	645.4	NA	632.0	NA
VRGO-01	Loudoun	300	Igneous intrusive	3/2009 - Present	529.9	521.6	493.3	494.9
EVGN-01	Loudoun	320	Diabase	3/2009 - Present	321.8	320.2	312.9	316.1
LUNS-01	Loudoun	322	Hornfels	8/2013 - Present	284.7	281.3	264.3	269.4
LWTP-01	Loudoun	250	Metasiltstone	8/2013 - Present	240.6	238.3	233.1	234.7
JENK-01	Loudoun	600	Plutonic igneous intrusive	9/2021 -Present	514.5	513.9	508.5	508.8

#### Table 3. Monitoring wells and groundwater level data for 2023.

<sup>1</sup> Elevation above mean sea level.

<sup>2</sup> Historic data highs and lows are during the period of record through 2023.

In 2016, ground surface elevation were revised to 1-meter DEM derived from 2012 LiDAR.

Figure 11 shows hydrographs for selected monitoring wells described in Table 3 that are representative of groundwater levels in the County for calendar year 2023. Short-term natural increases in groundwater levels occur because of recharge from precipitation. In the absence of additional recharge from precipitation and outside influences such as nearby pumping, groundwater levels normally exhibit a steady, slow decline over time after rain events. Groundwater levels are typically highest in late spring/early summer and lowest in late fall/early winter. Assuming normal precipitation patterns, this is due to greater recharge to the groundwater system cooler winter/spring during weather when evapotranspiration is low, thereby allowing more water to infiltrate downward to the water table.



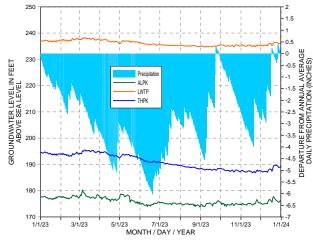


Figure 12. Groundwater hydrograph and daily rainfall in 2023.

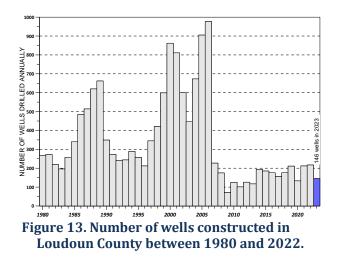

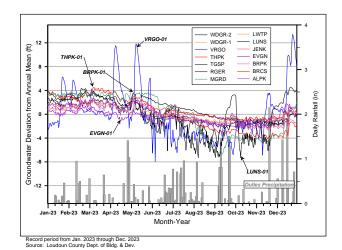

## Figure 11. Groundwater levels from selected County monitoring wells.

Figure 12 shows hydrographs from three monitoring wells described in Table 3 and the daily departure from annual average rainfall. Both data sets are during 2023 and show the response of groundwater levels to precipitation events. Note that during late summer, when conditions are generally dryer and evapotranspiration is highest, response to even significant rain events will produce only subtle increases in groundwater level.

During 2023, 145 new water supply wells were constructed. Figure 13 presents the number of wells drilled each year since 1980. The installation of new wells is primarily driven by the pace of residential construction and, occasionally, zoning affecting residential development changes potential. As occurred during the previous ten years, the number of new wells drilled in 2023 remained relatively low. The median total depth of wells installed in 2023 was 435 feet with the depths ranging from 60 to 1,100 feet. The median estimated yield (based on air-lift pumping) was 21.6 gallons per minute with yields ranging from 0.4 to 600 gallons per minute.

The median depth of wells drilled in Loudoun County has increased from 200 feet during 1970s to over 400 feet since 2000. The increase has been possible because of advances in drilling technology, allowing wells to be drilled less expensively, quicker, and deeper to provide increased water storage.

#### WATER QUALITY


The quality of surface water in Loudoun County was quantified in 2023 using several metrics including chemical, microbiological, and benthic macroinvertebrates. Groundwater quality was assessed through chemical, and bacteria analyses conducted on well water samples. Monitoring results from each of these data types are discussed below.


#### **Surface Water Chemistry**

Chemical sampling and analysis of surface water in 2023 was primarily conducted by the Virginia Department of Environmental Quality (DEQ) as part of their state-wide <u>surface</u> <u>water quality sampling program</u>.

In 2023, DEQ collected samples from 15 and 14 sites and conducted 117 and 107 analyses of phosphorous and nitrogen, respectively. Nutrient enrichment has been identified as a major cause of the reported stream impairments nationwide and can lead to low dissolved oxygen, fish kills, shifts in flora and fauna and blooms of nuisance algae. Figure 14 illustrates the results of sampling by DEQ for nitrogen and phosphorus in the surface waters from Loudoun County during 2023.

In 2000, the U.S. Environmental Protection Agency (EPA) developed ambient water quality criteria recommendations and information for 14 nutrient eco-regions in the continental United States. Individual states could adopt the criteria developed by EPA or elect to develop their own criteria and methodologies. Virginia has not yet adopted nutrient criteria. The percent of

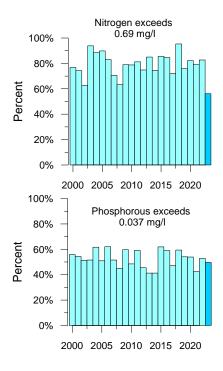



stream samples which exceed the threshold levels for nitrogen and phosphorous between 2000 and 2023 are shown in Figure 14. In 2023, approximately 56 percent and 50 percent of the samples collected by DEQ contained nitrogen and phosphorus concentrations above the 0.69 mg/L and 0.037 mg/L EPA guidance criteria, respectively.

#### **Surface Water Microbiology**

The primary microbiological area of concern for surface water relates to pathogens that may adversely affect human health. An accepted practice to test for pathogens from human and warm-blooded animal feces is to test water for *Escherichia coli* (*E. coli*) bacteria as an indicator of contamination. EPA uses *E. coli* concentrations as an indicator of whether the water is considered safe for humans after casual contact. This criterion is identified by EPA as "recreational use" and includes activities such as swimming, fishing, and boating.

In 2023, DEQ collected and analyzed 111 samples from the watersheds of Loudoun County and found that 32 percent were above the recreational limit of 235 *E. coli* colonies per 100 milliliters. Stream segments that are tested and exceed the recreational use criteria more than 10.5 percent of the time may be identified as "impaired" by DEQ. Using a similar approach, Table 4 summarizes the number of sites in which more than 10.5 percent of the samples exceeded the recreational limit over the last ten years. Several programs are in place to reduce bacterial contamination in the impaired surface waters of Loudoun County including initiatives to repair or upgrade on-site wastewater treatment systems (e.g., septic systems and drain fields), reduce pet waste, and fence livestock out of streams.

Year	Number of Samples	Number of Monitoring Sites <sup>1</sup>	Number of Sites Exceeding <sup>2</sup>	Percent Sites Exceeding <sup>3</sup>
2009	101	16	13	81%
2010	122	20	8	90%
2011	124	24	19	85%
2012	117	24	19	79%
2013	136	20	19	95%
2014	62	10	8	80%
2015	118	16	15	94%
2016	123	14	12	86%
2017	72	13	6	46%
2018	107	14	13	93%
2019	58	9	9	100%
2020	57	9	8	89%
2021	148	13	11	85%
2022	187	22	17	77%
2023	111	15	12	80%

#### Table 4. Summary of surface water microbiological testing by DEQ.

<sup>2</sup> Exceeds recreational use criteria for *Escherichia coli* in more than 10.5% of the samples

<sup>3</sup> Percent of the sites when more than 10.5% of samples exceeded recreational use criteria.

#### **Benthic Macroinvertebrates**

Benthic macroinvertebrates are stream bottom-dwelling invertebrate organisms (mostly insect larvae) that can be seen without magnification. Their tolerance of poor water quality varies depending on the species and, as a result, these organisms are used as indicators of water quality.

Sampling a stream for benthic macro-invertebrates usually involves collecting all the organisms within a small area of the stream bottom, identifying the types of organisms collected to the order, family, or genus taxa level, and counting the number of each type. These results are then converted to a "macroinvertebrate score" which is used to qualitatively grade the water quality. Two techniques are used to evaluate the benthic macro-invertebrate populations: the more rigorous Virginia Stream Condition Index (VA SCI) at both the family and genus level used by DEQ and the Virginia Save Our Streams (VA SOS) index used by several citizen volunteer organizations in and adjacent to the County.

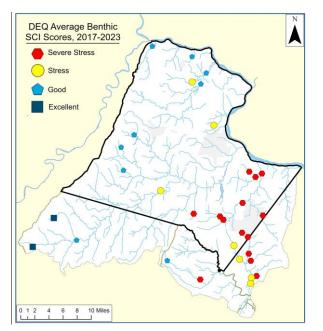


Figure 15. Summary of DEQ benthic monitoring results.

During the period 2017 through 2023, DEQ sampled a total of 104 times at 32 locations in Loudoun and calculated VA SCI scores which ranged from Severe Stress to Excellent. Figure 15 illustrates the average stream conditions from benthic samples collected by DEQ between 2017 and 2023. Several volunteer organizations in Loudoun Watershed Watch collect benthic macroinvertebrate data. From 2017 through 2023, Loudoun Wildlife Conservancy, Goose Creek Association, and other volunteer groups collected 192 samples from approximately 66 locations using the VA SOS methodology. Results ranged from Acceptable to Unacceptable as shown in Figure 16.

Benthic macroinvertebrate species vary in their tolerance of poor water quality. Monitoring benthic populations is an efficient way for professionals and volunteers to assess one aspect of stream water quality.

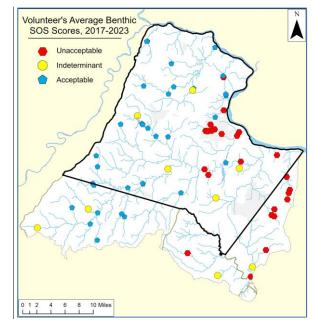


Figure 16. Summary of volunteer benthic monitoring results.

#### **Stream Impairments**

Each year, DEQ tests a statistically significant fraction of Virginia's streams, rivers, lakes, and tidal waters as part of their water quality assessment program. Over 130 different pollutants are monitored to determine whether the waters can be safely used for swimming, fishing, and drinking. Waters that do not meet the adopted standards are reported to EPA in the Clean Water Act 303(d) Impaired Waters Report. DEQ has developed lists of impaired waters every even calendar year since 1992. In Loudoun County, DEQ water quality impairments have included:

- aquatic life (benthic macroinvertebrates)
- recreational/swimming (bacteria)
- fishing/consumption (tissue analysis)

In the latest report, there were over 200 stream miles in Loudoun County identified as impaired for one or more criteria. Listing a stream as "impaired" begins a multi-year process of identifying pollution sources, determining appropriate pollution loadings, and designing and implementing corrective measures. Figure 17 through Figure 20 illustrate the impairments for aquatic life use, recreational/ swimming use, fish consumption and public water supply, respectively. The Draft 2024 EPA 305(b)/303(d) Water Quality Assessment Integrated Report was released April 22, 2024.

Surface water quality impairments are reported to the Environmental Protection Agency every two years by the Virginia Department of Environmental Quality (DEQ). The Draft 2024 305(b)/303(d) <u>Water Quality Assessment Integrated Report</u> (Integrated Report) summarizes the water quality conditions from Jan. 1, 2017, to Dec. 31, 2022.

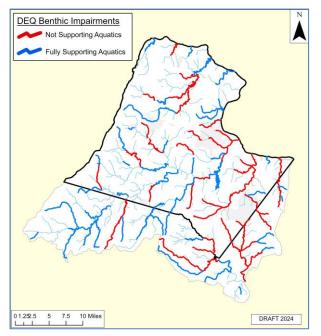


Figure 17. Aquatic life use (benthic macroinvertebrates) impaired stream segments.

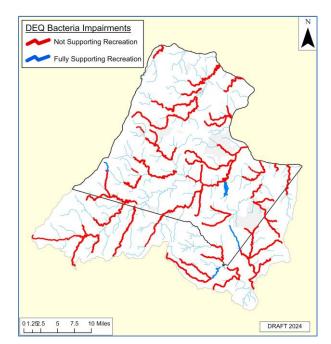


Figure 18. Recreational/swimming use (bacteria) impaired stream segments.

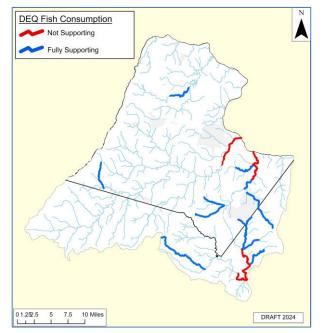


Figure 19. Fish consumption use (PCB and mercury in fish tissue) impaired stream segments.

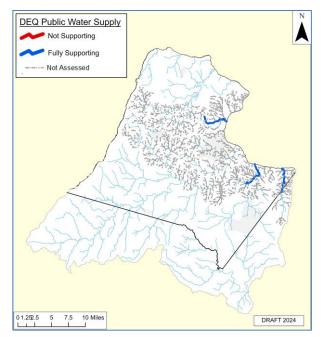


Figure 20. Public water supply use (chemicals) impaired stream segments.

#### **Groundwater Quality**

Groundwater is the source of drinking water for most of Loudoun County outside of Loudoun Water's central service area (see Figure 1) and the Town of Leesburg. Information on groundwater quality is obtained from several sources. Before new potable water wells can be used, they must be tested and pass drinking water quality standards for a wide range of chemical parameters listed by the County Health Department. In 2023, groundwater samples collected and analyzed from new wells were generally consistent with historical data (Table 5). There are large areas of the County that have elevated levels of iron and manganese; secondary contaminants (aesthetic) that do not adversely affect human health. In general, groundwater quality in the County is good.

## Table 5. Statistics for selected groundwater chemistry parameters.

Analyte	MCL(mg/L)	Sam	ples	# above MCL	% above MCL
Nitrate	10	All	5659	0	0.0%
		2023	328	0	0.0%
Sulfate	250	All	6037	1	0.0%
		2023	328	0	0.0%
Lead	0.015	All	5544	0	0.0%
		2023	328	8	2.4%
Fluoride	4	All	5612	0	0.0%
		2023	328	0	0.0%
Arsenic	0.01	All	5549	0	0.0%
		2023	328	0	0.0%
Manganese	0.05*	All	4349	108	1.8%
		2023	328	290	88.4%
Iron	0.3*	All	5544	116	2.0%
		2023	328	276	84.1%
TDS	500*	All	5598	2	0.0%
		2023	328	2	0.6%

Table 5. Results of Water Quality Analyses. All records vs. 2023.

The most prevalent sources of potential groundwater pollution are the on-site wastewater treatment systems (OWTS) serving homes and small businesses in the rural areas of the County. There are approximately 17,933 active OWTSs in the County and during 2023, 59 new OWTSs were installed of which 23 were not conventional septic tank / drainfield systems. An OWTS that is properly installed and serviced should not pose a threat to groundwater quality. However, improper OWTS installation or maintenance can cause wastewater to be untreated or undertreated and lead to groundwater or surface water contamination. Because OWTSs are typically used in areas with private water wells, it is important to properly maintain the OWTS and regularly have the well water sampled and tested to assure that it is safe to drink. The Loudoun County Department of Environmental Health can provide information on maintenance and testing of private water wells and (https://www.loudoun.gov/5744/Wells-Onsite-Septic-**OWTSs** Systems).

There are a few isolated locations in where significant the County groundwater contamination is known to exist. The most notable location is the Hidden Lane Landfill in northeast Loudoun, which was placed on the EPA's National Priorities List (Superfund). The EPA has developed fact sheets to update citizens on clean-up and investigation activities at the site. The latest Hidden Lane fact sheet and more information can be found by visiting the EPA web site.

*Of the 328 groundwater* samples reported to the Health Department in 2025 (Table 5), there were a few samples with analyte concentrations (sulfate and arsenic) that were higher than the EPA Maximum Contaminant Level (MCL). Secondary MCL for manganese, iron and total dissolved solids were exceeded. Groundwater quality in Loudoun is generally good, but these data show why private drinking water well owners should have their well water tested regularly to ensure that the water is safe to consume.

#### Summary


This annual report provides a concise summary of water resource monitoring data collected in and adjacent to Loudoun County, by government, private and volunteer organizations during calendar year 2023. Specifically, the report summarizes data characterizing precipitation, streamflow, groundwater levels, and surface water and groundwater quality. The data are presented in a concise format with an emphasis on the processed data, rather than raw readings or measurements. Observations and key findings for 2023 include:


- Greater than normal precipitation especially during July, September and December.
- Streamflow rates were significantly below normal with no new peak discharges and three streams (Beaverdam Creek, Goose Creek Middleburg) in which there were many days when the flow was less than 0.2 cubic feet per second (CFS).
- Groundwater water levels observed at the monitoring well network were typical and two displayed new low values.
- Surface water nutrient levels were typical and without changes in the long-term trend.
- Bacteria levels in streams remained consistently high.
- Stream monitoring for benthic macroinvertebrate exhibited higher stress levels in eastern Loudoun.
- Groundwater concentration of manganese and iron for new wells drilled in 2023 was higher than the average of previous years.

#### WATER RESOURCES 2023 HIGHLIGHT: GROUNDWATER RECHARGE UPDATE

The rate of groundwater recharge can be calculated from the daily streamflow rates as monitored at ten stream gages in the County. In support of the <u>2008 Comprehensive Watershed Management Plan</u>, recharge rates were evaluated where many of the gages had less than 10 years of data. Data were analyzed in detail in <u>2007 Report on baseline conditions</u>. Now a majority of the gages have more than 23 years of data.


Name	USGS Site Number	Drainage Area (sq mi)	Year of First Complete Record	Annual Average for Entire Record (in/yr)
South Fork Catoctin Creek	1638350	31.6	2002	10.4
North Fork Catoctin Creek	1638420	23.1	2002	10.8
Catoctin Creek	1638480	89.5	1972	10.4
Piney Run	1636690	13.5	2002	11.6
Limestone Branch	1643590	7.88	2002	10.3
North Fork Goose Creek	1643805	38.1	2002	11.5
Beaverdam Creek	1643880	47.2	2002	9.9
Goose Creek (Middleburg)	1643700	122	1970	11.5
Goose Creek (Leesburg)	1644000	332	1930	9.3
Broad Run	1644280	76.1	2002	9.5
Average				12.0

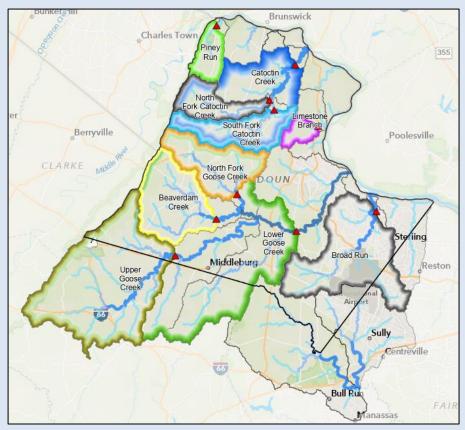



#### Moment to Remember Effect of Earthquake on Groundwater Level at Monitoring Wells

The effect of the earthquake in central Virginia was observed in the Loudoun County Water Level Monitoring network. This occurred in 2011 near Mineral in central Virginia about 80 miles from Loudoun County. The first quake in August 23, 2011 was <u>magnitude 5.8</u> on the Richter scale where the earthquake damaged several sites in Washington D.C., including Washington Monument and National Cathedral. Over the next day, three <u>smaller</u> <u>earthquakes</u> occurred. The earthquake occurred as reverse faulting on a north or northeast-striking plane within a previously recognized seismic zone, the "Central Virginia Seismic Zone." The Central Virginia Seismic Zone has produced small and moderate earthquakes since at least the 18th century. The previous largest historical shock from the Central Virginia Seismic Zone occurred in 1875.

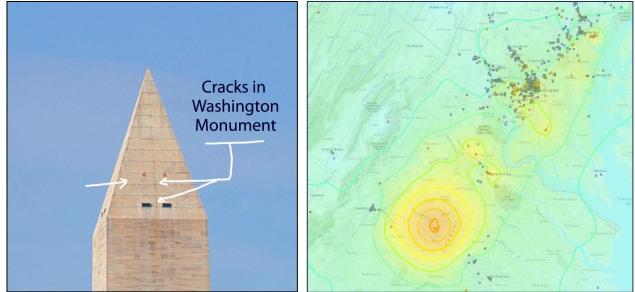

At the Harmony School well water level rose immediately after the quake. Located in central western Loudoun, this well was taken offline in 2017. Other wells in the monitoring network did not respond.

